



LED
EMERGENCY LIGHT
SL-EL12VCU Series



Product characteristics (1) :

- Light up by high power Led Chip
- Power Lamp 3W x 2, 6W x 2
- Constant brightness throughout backup period
- Protection on Over Load, Short Circuits and Over Charge
- Led Life Time 50,000 Hour
- Automatic Cycle Time Self Test
- 10 year warranty on Led Bulb
- 5 year warranty on power board
- 2 year warranty on battery
- Free On Site Service

APPLICATION PLACE



Office



Meeting room



Factory



Underground parking garage



Office building



Hotel



Supermarket



Household life

MADE IN THAILAND



TIS 1102-2538



TIS 1955-2551

Skylight Technology International Co.,Ltd.

37/4-5 Moo.4, T.Taykoa, A.Samkhok, Pathumthani 12160, Thailand Tel : +662-1010377-9 Fax : +662-1010380 website : www.skylight.co.th





Office



Meeting room



Factory



Underground parking garage



Office building



Hotel



Supermarket



Household life


LED

EMERGENCY LIGHT SL-EL12VCU Series

Product Specification

Product model	SL-EL12VCU2203	SL-EL12VCU2503	SL-EL12VCU2803	SL-EL12VCU2306	SL-EL12VCU2506
Input voltage	220V / 50Hz+/-10%	220V / 50Hz+/-10%	220V / 50Hz+/-10%	220V / 50Hz+/-10%	220V / 50Hz+/-10%
LED Lamp Power	3W x 2	3W x 2	3W x 2	6W x 2	6W x 2
Color Temperature	5,500 - 6,500k , 2,700 - 3,000k	5,500 - 6,500k , 2,700 - 3,000k	5,500 - 6,500k , 2,700 - 3,000k	5,500 - 6,500k , 2,700 - 3,000k	5,500 - 6,500k , 2,700 - 3,000k
Rated Beam Angle	50Deg	50Deg	50Deg	50Deg	50Deg
Battery Type	Sealed Lead-Acid	Sealed Lead-Acid	Sealed Lead-Acid	Sealed Lead-Acid	Sealed Lead-Acid
Battery Capacity	12V1.3Ah	12V2.9Ah	12V5.0Ah	12V2.9Ah	12V5.0Ah
Battery cut-off Voltage	10.50VDC	10.50VDC	10.50VDC	10.50VDC	10.50VDC
Charging Current	130mA	130mA	130mA	130mA	130mA
Charging Time	10-15Hrs.	10-15Hrs.	10-15Hrs.	10-15Hrs.	10-15Hrs.
Backup Time	2.0Hrs.	5.0Hrs.	8.0Hrs.	3.0Hrs.	5.0Hrs.
Charging Mode	Constant voltage&Limit current				
Housing	Plastic ABS UL94 V-0 and Steel sheet, 1mm.				
Dimension (LxWxH)	250 x 80 x 230 mm.	250 x 80 x 230 mm.	250 x 80 x 230 mm.	250 x 80 x 230 mm.	250 x 80 x 230 mm.
Weight	2.0kg.	2.6kg.	3.2kg.	2.6kg.	3.2kg.

Dimension (mm)

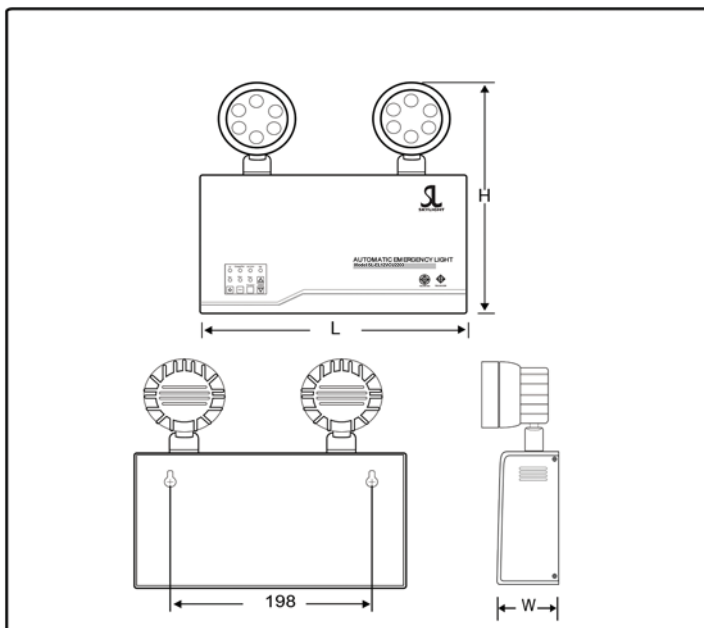

Indicators

AC	Charge/Full	BATTERY	Fail
5sec	30min	60min	IR receiver
DIMMER			

LED AC Display power status
LED Charge/Full Display battery charging status
LED Battery Display battery voltage level
LED Fail Display failure function
LED IR Receiver Display infrared receiving status
LED 5sec, 30min, 60min Display duration time testing
DIMMER 3 level dimming switch (support only HZ bulb)