



LED
EMERGENCY LIGHT
SL-EL12VAURT Series



Product characteristics (1) :

- Light up by high power Led Chip
- Power Lamp 3W x 2, 6W x 2
- Constant brightness throughout backup period
- Protection on Over Load, Short Circuits and Over Charge
- Led Life Time 50,000 Hour
- Remote Control Self Test
- 10 year warranty on Led Bulb
- 5 year warranty on power board
- 2 year warranty on battery
- Free On Site Service

APPLICATION PLACE



Office



Meeting room



Factory



Underground parking garage



Office building



Hotel



Supermarket



Household life

MADE IN THAILAND



TIS 1102-2538



TIS 1955-2551

Skylight Technology International Co.,Ltd.

37/4-5 Moo.4, T.Taykoa, A.Samkhok, Pathumthani 12160, Thailand Tel : +662-1010377-9 Fax : +662-1010380 website : www.skylight.co.th





Office



Meeting room



Factory



Underground parking garage



Office building



Hotel



Supermarket



Household life


LED

EMERGENCY LIGHT SL-EL12VAURT Series

Product Specification

Product model	SL-EL12VAURT2203	SL-EL12VAURT2503	SL-EL12VAURT2803	SL-EL12VAURT2306	SL-EL12VAURT2506
Input voltage	220V / 50Hz+/-10%	220V / 50Hz+/-10%	220V / 50Hz+/-10%	220V / 50Hz+/-10%	220V / 50Hz+/-10%
LED Lamp Power	3W x 2	3W x 2	3W x 2	6W x 2	6W x 2
Color Temperature	5,500 - 6,500k , 2,700 - 3,000k	5,500 - 6,500k , 2,700 - 3,000k	5,500 - 6,500k , 2,700 - 3,000k	5,500 - 6,500k , 2,700 - 3,000k	5,500 - 6,500k , 2,700 - 3,000k
Rated Beam Angle	50Deg	50Deg	50Deg	50Deg	50Deg
Battery Type	Sealed Lead-Acid	Sealed Lead-Acid	Sealed Lead-Acid	Sealed Lead-Acid	Sealed Lead-Acid
Battery Capacity	12V1.3Ah	12V2.9Ah	12V5.0Ah	12V2.9Ah	12V5.0Ah
Battery cut-off Voltage	10.50VDC	10.50VDC	10.50VDC	10.50VDC	10.50VDC
Charging Current	130mA	130mA	130mA	130mA	130mA
Charging Time	10-15Hrs.	10-15Hrs.	10-15Hrs.	10-15Hrs.	10-15Hrs.
Backup Time	2.0Hrs.	5.0Hrs.	8.0Hrs.	3.0Hrs.	5.0Hrs.
Charging Mode	Constant voltage&Limit current				
Housing	Plastic ABS UL94 V-0 and Steel sheet, 1mm.				
Dimension (LxWxH)	250 x 80 x 240 mm.	250 x 80 x 240 mm.	290 x 80 x 250 mm.	250 x 80 x 240 mm.	290 x 80 x 250 mm.
Weight	2.83kg.	3.45kg.	4.25kg.	3.45kg.	4.25kg.

Dimension (mm)

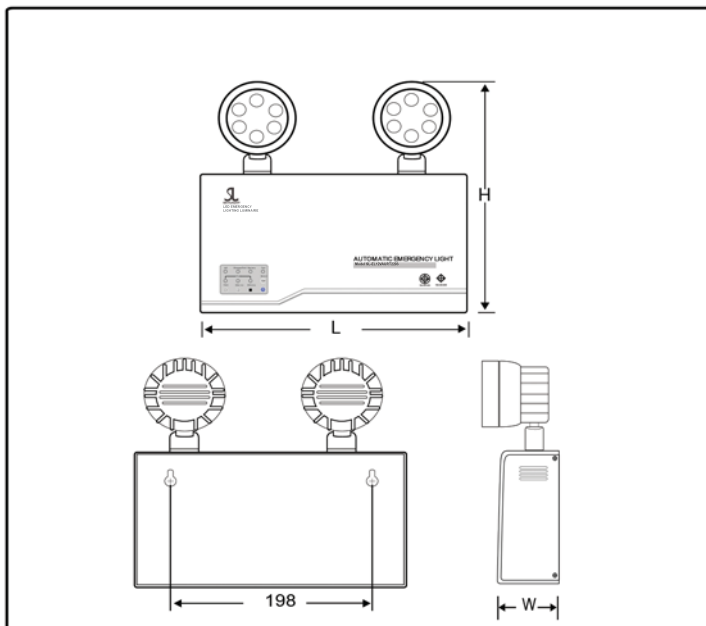

Indicators

- LED AC** Display power status
- LED Charge/Full** Display battery charging status
- LED Battery** Display battery power status
- LED Fail** Display battery charging failure
- Switch** Select duration time testing
- Switch** On / Off light bulb left hand side
- Switch** On / Off light bulb right hand side
- Switch** On / Off light bulb or cancel the test command