



SKYLIGHT

LED

Exit Sign Light
SL-SLEX1-210H Series



An accessory device



Product characteristics:

- Light up by high power Led Chip
- Constant brightness throughout backup period
- Protection on Over Load, Short Circuits and Over Charge
- Led Life Time 50,000 Hour
- Manual Switch Self Test (Support Remote Control)
- 5 year warranty on power board
- 3 year warranty on battery
- Free On Site Service

APPLICATION PLACE



Office



Meeting room



Factory



Underground parking garage



Office building



Hotel



Supermarket



Household life

MADE IN THAILAND



TIS 1102-2538



TIS 1955-2551

Skylight Technology International Co.,Ltd.

37/4-5 Moo.4, T.Taykoa, A.Samkhok, Pathumthani 12160, Thailand Tel : +662-1010377-9 Fax : +662-1010380 website : www.skylight.co.th





Office



Meeting room



Factory



Underground parking garage



Office building



Hotel



Supermarket



Household life


LED

Exit Sign Light SL-SLEX1-210H Series

Product Specification

Product model	SL-SLEX1-210H-S	SL-SLEX1-210H-D
Input Voltage	220Vac / 50Hz+/-10%	220Vac / 50Hz+/-10%
Input Current (max)	0.056A@220VAC	0.056A@220VAC
Input Power (max)	11.22W	11.22W
Input Power (standby)	7.04W	7.04W
LED Color Temperature	6,500k	6,500k
Lamp Current (AC)	0.670A	0.670A
Lamp Current (Battery)	0.65A@1.2V/Cell	0.65A@1.2V/Cell
Battery	Ni-Mh 1,800 Mah. (1.2Vx3)	Ni-Mh 1,800 Mah. (1.2Vx3)
Charge Current (max)	0.180A	0.180A
Charge Terminating Voltage	1.4V/Cell	1.4V/Cell
Charging Time	12Hrs.	12Hrs.
Battery low voltage cut-off	1.0V/Cell	1.0V/Cell
Backup Time	2.0Hrs.	2.0Hrs.
Housing	Steel sheet, 1mm. Thick Coated with Powder Paint	Steel sheet, 1mm. Thick Coated with Powder Paint
Dimension (LxWxH)	410 x 80 x 220 mm.	410 x 80 x 220 mm.
Weight	1.70kg. / S	1.70kg. / S
Display Sign Side	Single	Double

Dimension (mm)

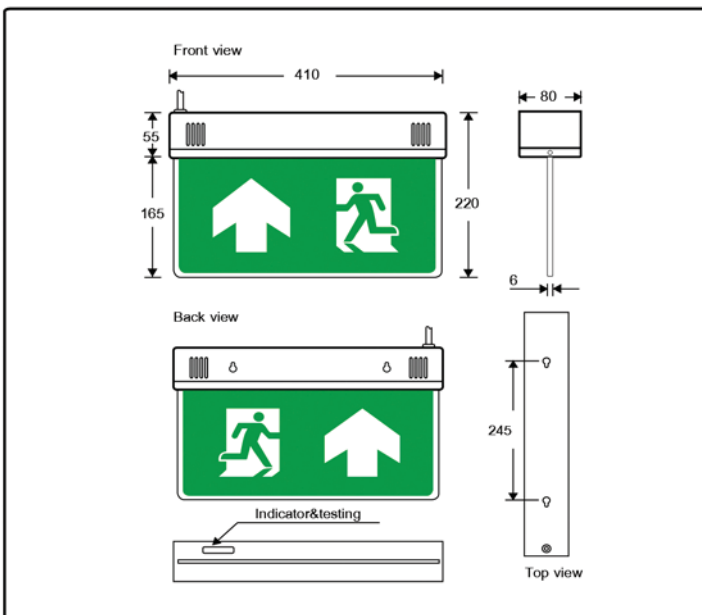

Standard Symbol

